


AD-A262 770



## NTATION PAGE

Form Approved  
OMB No. 0704-0185

Please 1 hour per response, including the time for reviewing the comments received, to be used for the purpose of reducing this burden. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302, and to the Office of Management and Budget, Paperwork Reduction Project (0704-0185), Washington, DC 20503.

1. AGENCY USE ONLY (Leave blank)		2. REPORT DATE February 1993		3. REPORT TYPE AND DATES COVERED professional paper	
4. TITLE AND SUBTITLE A BROAD-BAND COPLANAR WAVEGUIDE TO SLOT LINE TRANSITION				5. FUNDING NUMBERS In-house funding	
6. AUTHOR(S) T. Q. Ho and S. M. Hart					
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) Naval Command, Control and Ocean Surveillance Center (NCCOSC) RDT&E Division San Diego, CA 92152-5001				8. PERFORMING ORGANIZATION REPORT NUMBER	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES) Naval Command, Control and Ocean Surveillance Center (NCCOSC) RDT&E Division San Diego, CA 92152-5001				10. SPONSORING/MONITORING AGENCY REPORT NUMBER	
11. SUPPLEMENTARY NOTES					
12a. DISTRIBUTION/AVAILABILITY STATEMENT  Authorized for public release; distribution is unlimited.				12b. DISTRIBUTION CODE  DTIC S APR 12 1993 D	
13. ABSTRACT (Maximum 200 words)  A novel approach for designing a broad-band coplanar waveguide (CPW) to slotline transition is presented. A slotline hollow patch creates open circuit conditions on one arm of the CPW and resonates the transition so that maximum power transfer may occur. Excellent performance is observed over a 5:1 bandwidth.					
<div style="display: flex; justify-content: space-between; align-items: flex-end;"> <div> <p>09</p> <p>044</p> </div> <div> <p>93-07502</p> <p>496</p> </div> </div> <p>Published in <i>IEEE Microwave and Guided Wave Letters</i>, Vol. 2, No. 10, October 1992.</p>					
14. SUBJECT TERMS  broad-band coplanar waveguide (CPW) slotline bandwidth				15. NUMBER OF PAGES	
				16. PRICE CODE	
17. SECURITY CLASSIFICATION OF REPORT  UNCLASSIFIED	18. SECURITY CLASSIFICATION OF THIS PAGE  UNCLASSIFIED	19. SECURITY CLASSIFICATION OF ABSTRACT  UNCLASSIFIED	20. LIMITATION OF ABSTRACT  SAME AS REPORT		

UNCLASSIFIED

<small>21a NAME OF RESPONSIBLE INDIVIDUAL</small> T. Q. Ho	<small>21b TELEPHONE (Include Area Code)</small> (619) 553-2589	<small>21c OFFICE SYMBOL</small> Code 753

# A Broad-Band Coplanar Waveguide To Slotline Transition

Thinh Q. Ho and Stephen M. Hart

**Abstract**—A novel approach for designing a broad-band coplanar waveguide (CPW) to slotline transition is presented. A slotline hollow patch creates open circuit conditions on one arm of the CPW and resonates the transition so that maximum power transfer may occur. Excellent performance is observed over a 5:1 bandwidth.

## I. INTRODUCTION

THE MAJOR effort until now has been directed at optimizing the microstrip to slotline transition [1]; however, the same emphasis has not been expended on a broad-band CPW to slotline equivalent [2], [3]. This letter discloses a very broad-band CPW to slotline transition. One important advantage of this type of transition is that both the CPW and slotline are printed on the same side of the substrate. Since the transition is uniplanar, no via-holes are needed for ground connections; it is therefore much easier to fabricate and to perform the integration with other circuitries. Another important advantage of this type of transition is that low insertion loss and excellent match over a bandwidth of more than 5:1 are considered achievable.

## II. DESIGN DESCRIPTION

Fig. 1 shows the geometry and the equivalent network of a CPW to slotline transition. For CPW, the spacing between the center conductor of width  $W_c$  and the adjacent ground planes is  $S_c$ , while for the slotline the gap width is  $S_s$ . The power transfer between the two transmission line configurations is realized through a CPW single arm open circuit and an impedance matched slotline. The input and output characteristic impedances ( $Z_c, Z_s$ ) were computed using the spectral domain technique [4], [5] and were selected to be 50 Ohms. The bandwidth of the transition is greatly enhanced, since the design has a broad-band open circuit. With this topology, the hollow patch of radius  $R_s$  represents a very wide-band open circuit at the junction. The dimensions of the hollow patch are experimentally determined for a given frequency band.

## III. RESULTS

Testing was done on the complete circuit composed of two transitions in a back to back configuration. In the actual layout,  $W_c = 5.0$  mils,  $S_c = 2.0$  mils, and  $S_s = 2.1$  mils were chosen

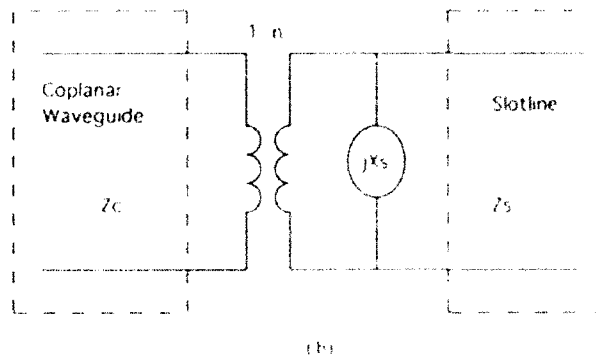
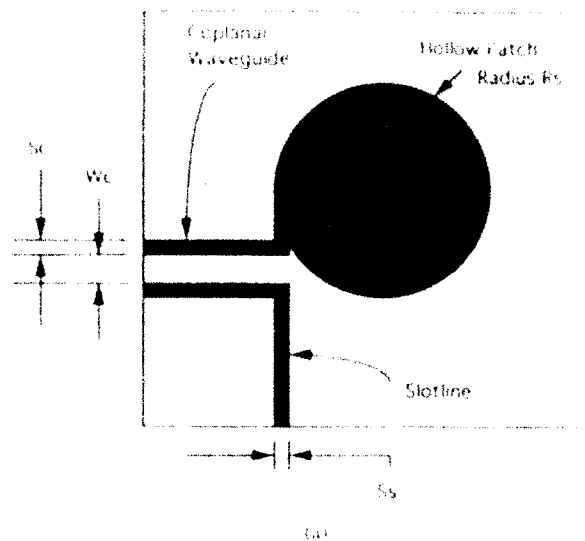


Fig. 1. Coplanar waveguide to slotline transition. (a) Geometry. (b) Equivalent network.

for a 50-mil thick substrate with dielectric constant of 10.0. Fig. 2 displays the resulting data with  $R_s$  equal to 62.5 mils. The input return loss has a two pole response with minimum values of 32.0 dB and 27.0 dB at frequencies of 9.96 GHz and 4.31 GHz, respectively. An input return loss of 17.5 dB was measured at the center of the frequency band. Additionally, this figure shows the overall insertion loss of the circuit, a total insertion loss of about 0.35 dB was observed over most of the bandwidth. Note that the two transitions are separated by 350.0 mils and the printed circuit board was tested using Wilttron's Universal Test Fixture and Vector Network Analyzer. The response of the transition when  $R_s$  was 75.0 mils is also plotted in Fig. 2 for comparison. Rather intuitively, it was observed that as the radius of the hollow patch becomes larger, the frequency response shifts downward and vice versa.

Manuscript received June 25, 1992.

The authors are with NCCOSC, RDT & E Division, Code 753, San Diego, CA 92152-5000.

IEEE Log Number 9203257

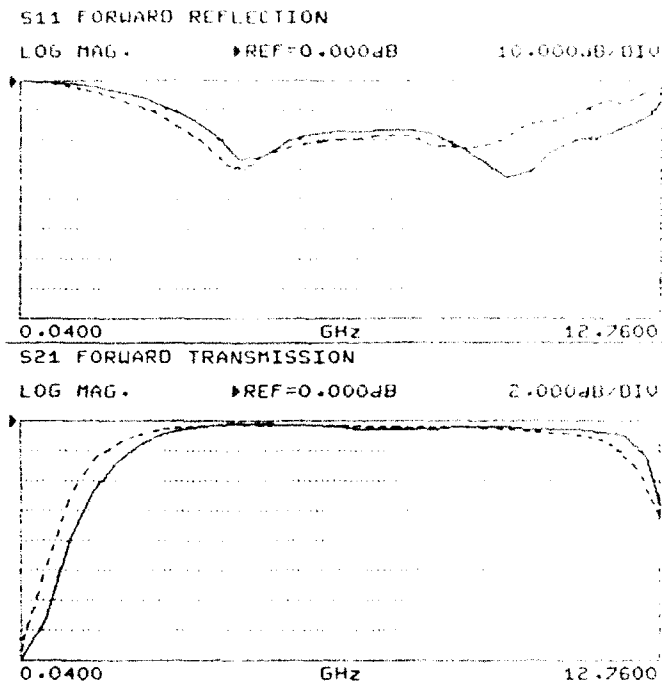


Fig. 2. Measured input return loss and insertion loss of two transitions in a back-to-back configuration with  $W_c = 5.0$  mils,  $S_c = 2.0$  mils,  $S_s = 2.1$  mils,  $h = 50.0$  mils,  $\epsilon_r = 10.0$ . Solid line:  $R_1 = 62.5$  mils. Dashed line:  $R_2 = 75.0$  mils.

#### IV. CONCLUSION

An experimental CPW-to-slotline transition has revealed the usefulness of the hollow patch to extend the bandwidth of inter-media power transfer. This design is simple to implement and allows easy iteration. Because of its excellent bandwidth, it is immediately recognized as a viable method for transferring power between the two transmission line media. Also, in applications involving printed circuit antennas, this transition could be invaluable for integration of wide band printed circuit antennas excited by a balanced arm feed printed on the same side of the substrate.

#### REFERENCES

- [1] K. C. Gupta, R. Garg, and T. J. Bahl, *Microstrip Lines and Slotlines*, Norwood, MA: Artech House Inc., 1979, pp. 231-294.
- [2] M. Muraguchi, T. Hirota, A. Minakawa, K. Ohwada, and T. Supeta, "Uniplanar MMIC's and their applications," *IEEE Trans. Microwave Theory Tech.*, vol. 36, pp. 1896-1901, Dec. 1988.
- [3] D. Cahana, "A new coplanar waveguide/slotline double balanced mixer," in *IEEE MTT-S Int. Microwave Symp. Dig.*, 1989, pp. 967-968.
- [4] T. Itoh and R. Mittra, "Dispersion characteristics of slotlines," *Electron. Lett.*, vol. 7, pp. 364-365, 1971.
- [5] J. B. Knorr and K. D. Kuchler, "Analysis of coupled slots and coplanar strips on dielectric substrate," *IEEE Trans. Microwave Theory Tech.*, vol. MTT-23, pp. 541-548, July 1975.

<b>Accession For</b>	
NTIS GRA&I	<input checked="" type="checkbox"/>
DTIC TAB	<input type="checkbox"/>
Unannounced	<input type="checkbox"/>
Justification	
By	
Distribution	
Availability Codes	
Avail and/or	
Dist	Special
A-1	20